

“CHARLY” 150W LED HIGH BAY






IP65





Product Name	Charly			
SKU	K-10500	K-10501	K-10502	K-10503
CCT	3000K	4000K	5000K	5700K
LED Type	SAMSUNG 2835			
LED QTY	435PCS			
Luminous flux	170 Lm/W			
Luminous Flux	25500LM			
Beam Angle	120°			
CRI	>80Ra			
System Efficiency	>90			
Power Supply	LIFUD Dimmable 1-10V			
Input Voltage	AC 220-240V			
Power Frequency	50/60Hz			
Output Voltage	180-260VDC			
Output Current	0.5-0.75A(Constant Corrent)			
Power Efficiency	>90%			
Power Factor	>0.90			
Total Harmonic Distortion	<15%			
System Power consumption	150W±5W			
LED Power Consumption	140W±5W			
Fixture Material	ADC12 Aluminum alloy			
Ingress Protection	Ip65			
Net Weight	3.1kg ±0.3			
Grossweight	3.9kg ±0.5			
Lifespan	>50000Hrs(Ta=30°C @LM70)			
Junction Temperature	<75°C (Ta=30°C)			
Storage Temperature	(-40~ + 70°C)			
Operating Temperature	(-30~ + 50°C)			
Operating Humidity	15 - 90% RH			
Outlook Dimensions	Φ305*172mm			
Cartion size	L345*W345*H195mm			




150WSize

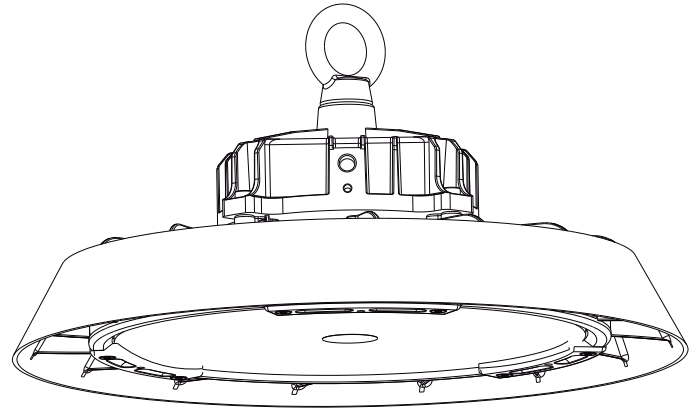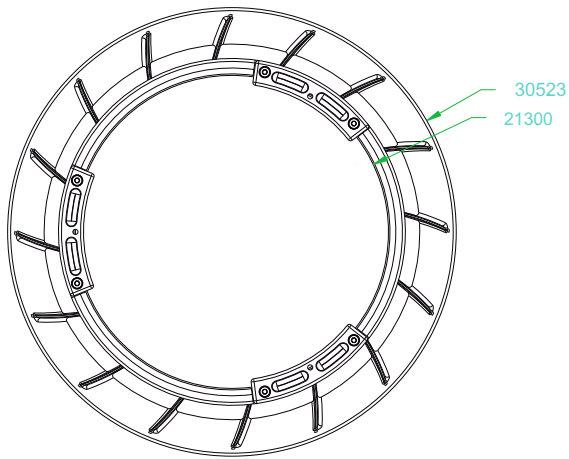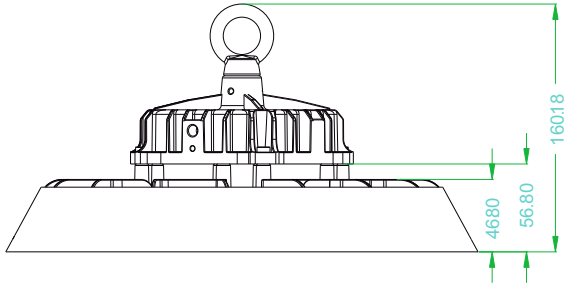


60° PC Reflector

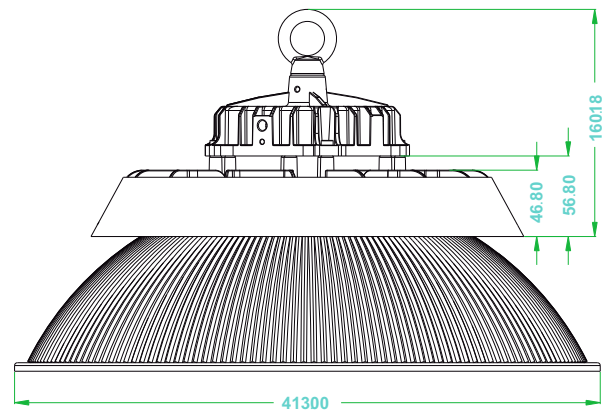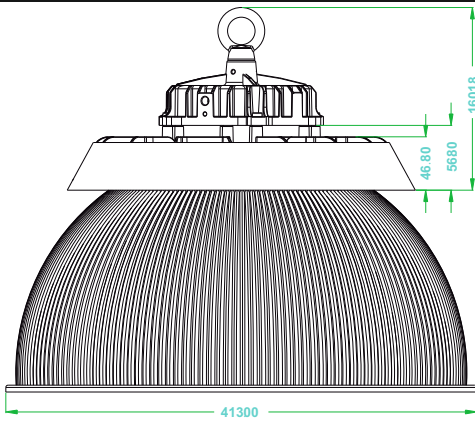

60° AL Reflector

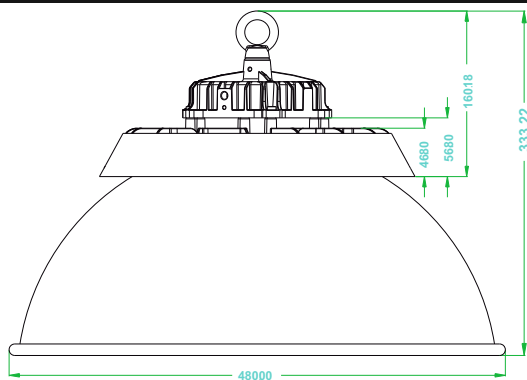


90° AL Reflector

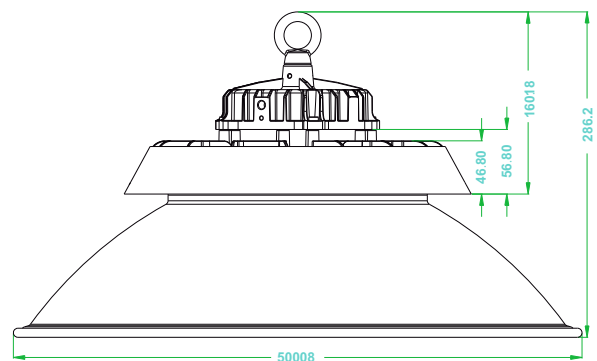


Installation method


Hoisting

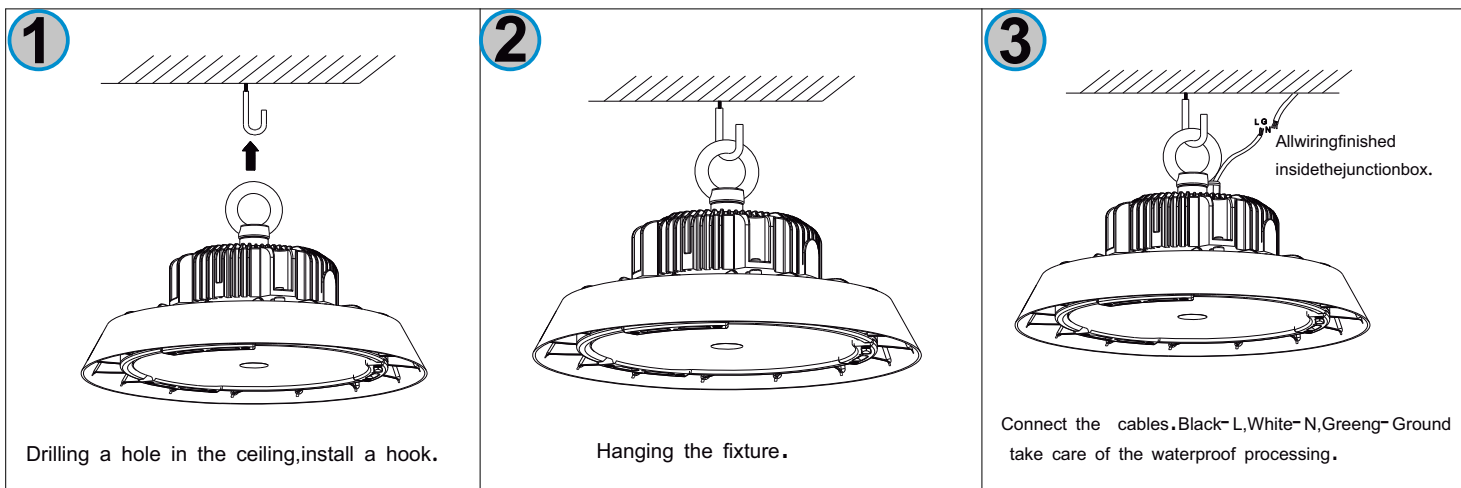



Ceiling installation

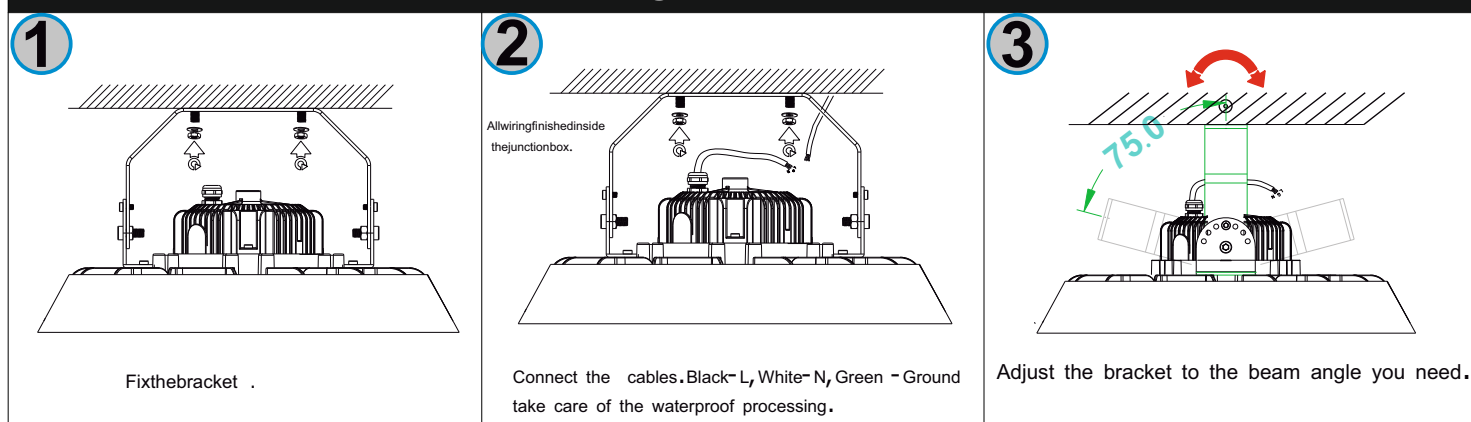



Wall mounting

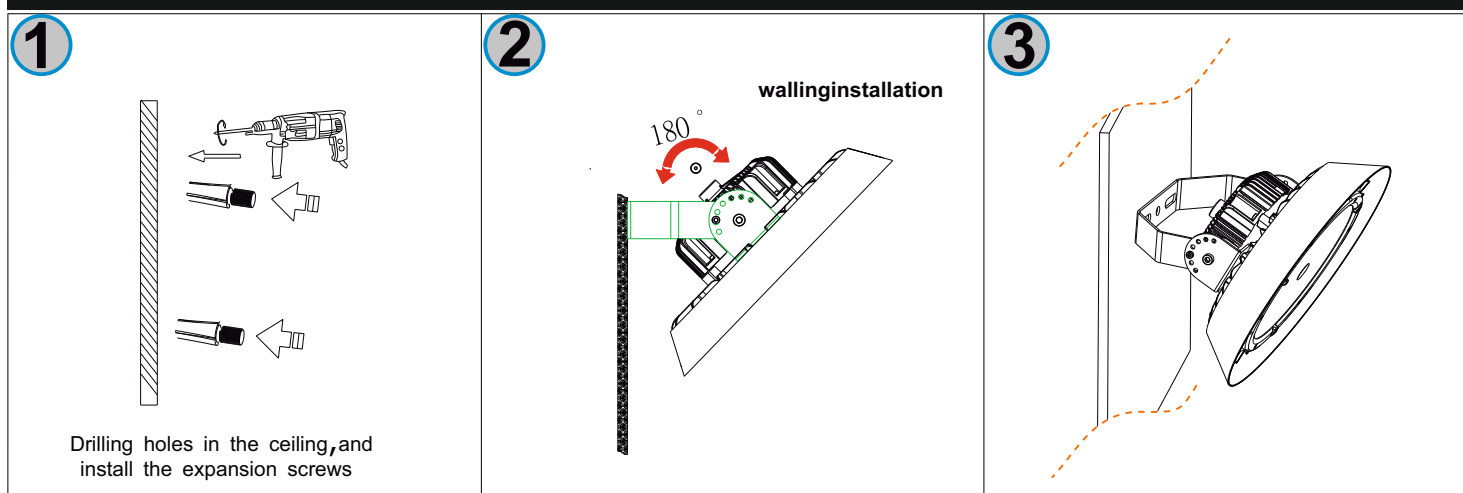



glass/120
Asymmetrical Width
19,500 Lumens
5000K

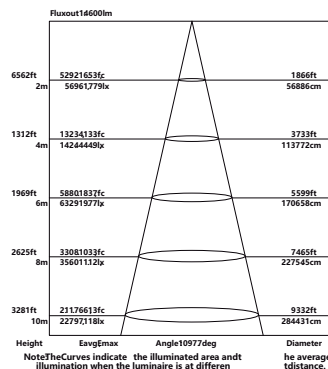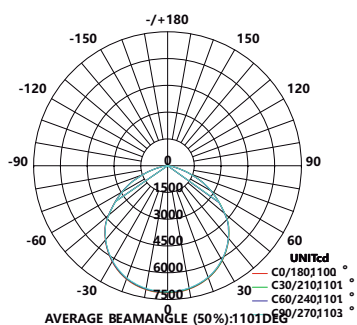



90° AL Reflector
Asymmetrical Wide
19,500 Lumens
5000K

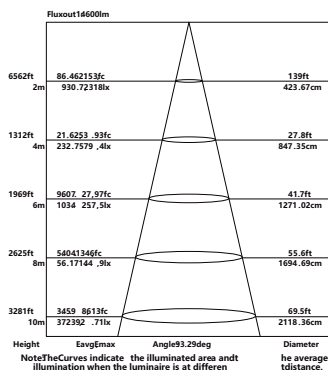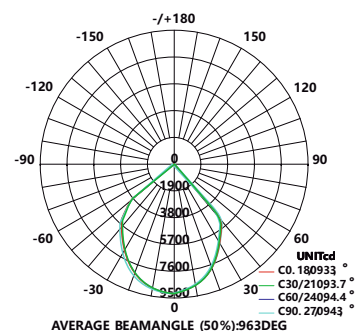

60° AL Reflector
Asymmetrical Ultra Wide
19,500 Lumens
5000K

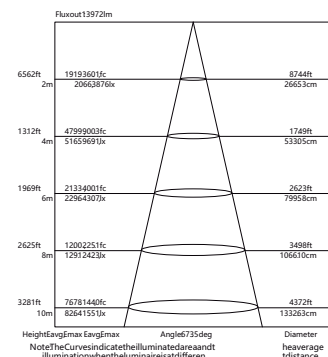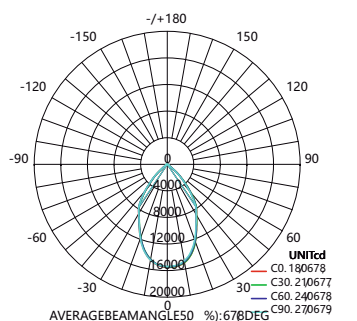

90° PC Reflector
Asymmetrical Wide
19,500 Lumens
5000K

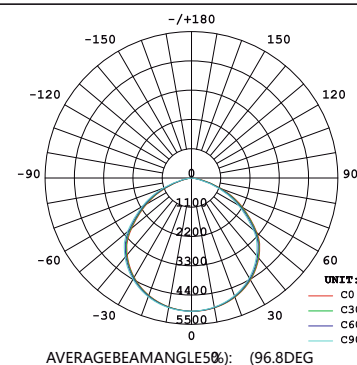

60° PC Reflector
Asymmetrical Ultra Wide
19,500 Lumens
5000K

