

60X60 BACK-LIT UGR<19


Code	Power	Kelvin	Lumens
K-E1024	36W	2900~3100K	3780lm
K-E1025	36W	4000~4500K	3960lm
K-E1026	36W	5500~6000K	3960lm




Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.3A	DC36V	0.90A	36W	≥0.95

Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L645*W95*H645MM	4.1Kg

Outer carton package 4*2layer= 8PCS/carton, L665*W405*H670mm,GW:18KG

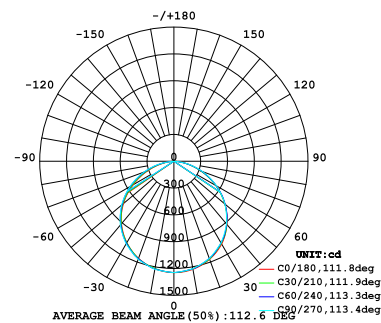

Dimensions

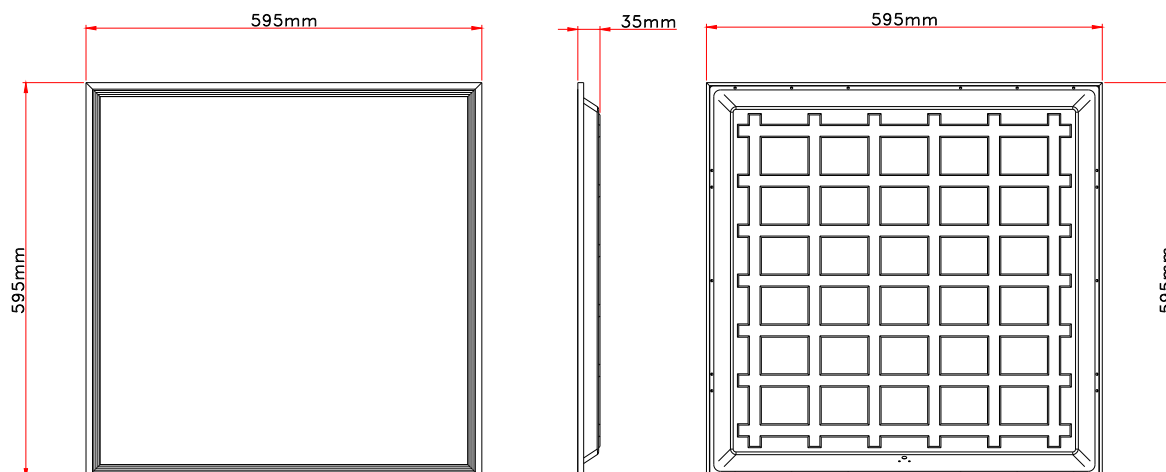

30X120 BACK-LIT UGR<19

Code	Power	Kelvin	Lumens
K-E1030	36W	2900~3100K	3780lm
K-E1031	36W	4000~4500K	3960lm
K-E1032	36W	5500~6000K	3960lm





Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.3A	DC36V	0.9A	36W	≥0.95

Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1245*W95*H345MM	4.1Kg

Outer carton package	4*2layer= 8PCS/carton, L1265*W405*H370mm,GW:18KG
----------------------	--

Dimensions

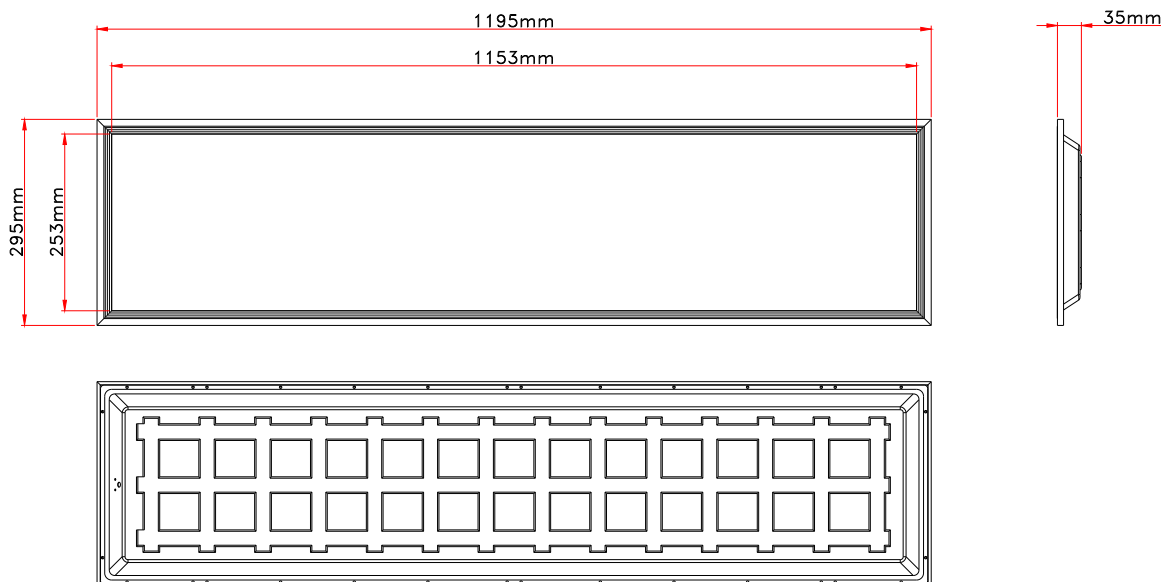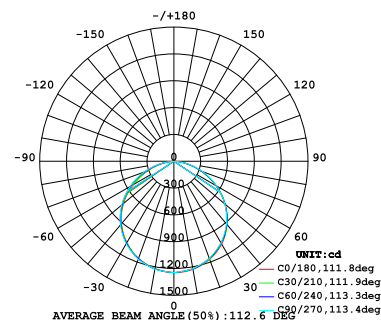

62X62 BACK-LIT UGR<19


Code	Power	Kelvin	Lumens
K-E1027	40W	2900~3100K	4200lm
K-E1028	40W	4000~4500K	4400lm
K-E1029	40W	5500~6000K	4400lm



Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.3A	DC36V	1.0A	40W	≥0.95

Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L670*W95*H670MM	4.3Kg

Outer carton package	4*2layer= 8PCS/carton, L690*W405*H695mm,GW:19.2KG
----------------------	---

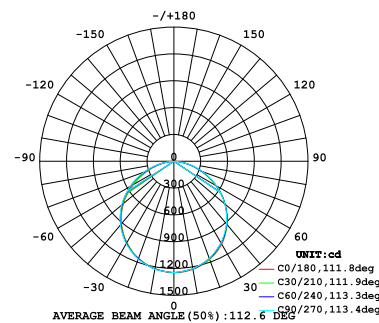

Dimensions

