


## RALF PANEL 60X60

| Code    | Power | Kelvin     | Lumens |
|---------|-------|------------|--------|
| K-E1040 | 36W   | 2900~3100K | 3960lm |
| K-E1041 | 36W   | 4000~4500K | 4140lm |
| K-E1042 | 36W   | 5000~5500K | 4320lm |

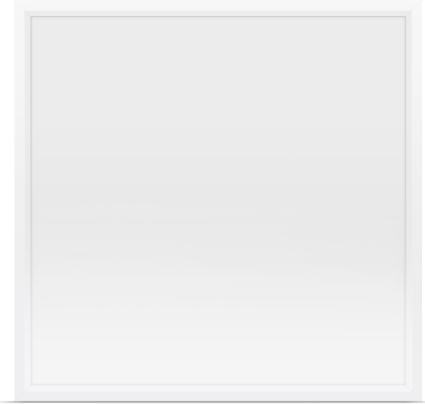


| Input Voltage | Max.Current | Operating Voltage | Constant Current | Power Consumption | Power Factor |
|---------------|-------------|-------------------|------------------|-------------------|--------------|
| AC200-240V    | 0.23A       | DC40V             | 0.8A             | 36W               | ≥0.95        |



| Operating Temperature | Storage Temperature | Humidity Operating | Humidity Storage | Packing dimension | G.W   |
|-----------------------|---------------------|--------------------|------------------|-------------------|-------|
| -20℃to+50℃            | -30℃to+60℃          | 10-80%RH           | 10-90%RH         | L695*W55*H955MM   | 6.6Kg |

Outer carton package

6\*1layer= 6PCS/carton, L670\*W180\*H695mm,GW:21KG

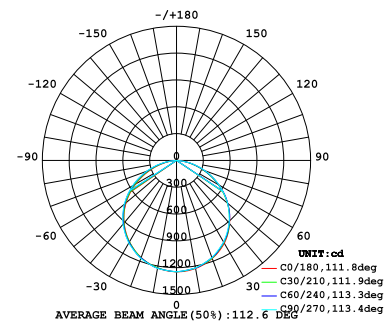

## Dimensions

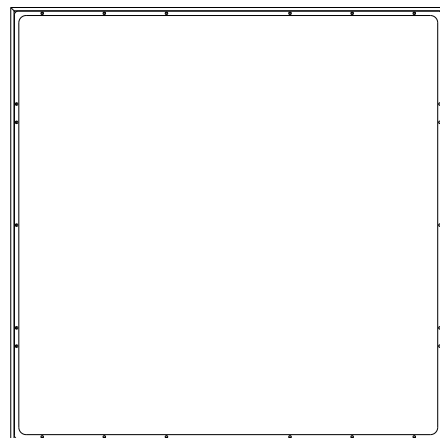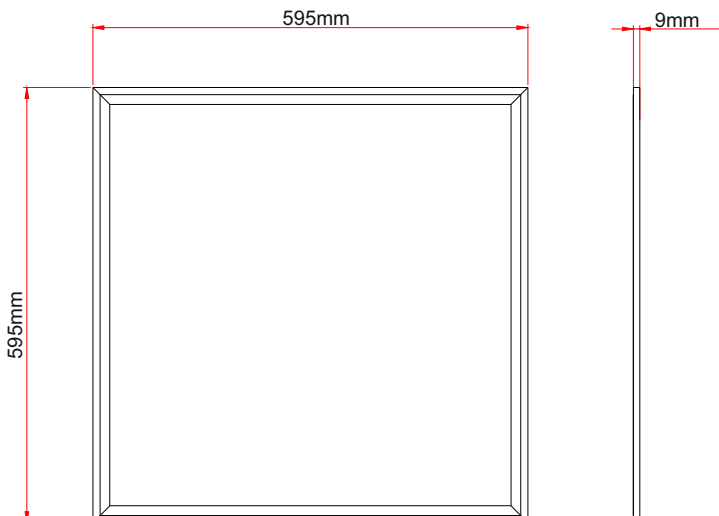

## RALF PANEL 30X120

| Code    | Power | Kelvin     | Lumens |
|---------|-------|------------|--------|
| K-E1043 | 36W   | 2900~3100K | 3960lm |
| K-E1044 | 36W   | 4000~4500K | 4140lm |
| K-E1045 | 36W   | 5000~5500K | 4320lm |




| Input Voltage | Max.Current | Operating Voltage | Constant Current | Power Consumption | Power Factor |
|---------------|-------------|-------------------|------------------|-------------------|--------------|
| AC200-240V    | 0.23A       | DC40V             | 0.8A             | 36W               | ≥0.95        |


| Operating Temperature | Storage Temperature | Humidity Operating | Humidity Storage | Packing dimension | G.W   |
|-----------------------|---------------------|--------------------|------------------|-------------------|-------|
| -20℃to+50℃            | -30℃to+60℃          | 10-80%RH           | 10-90%RH         | L1295*W55*H355MM  | 7.0Kg |

Outer carton package

6\*1layer= 6PCS/carton, L1310\*W180\*H355mm,GW :22KG

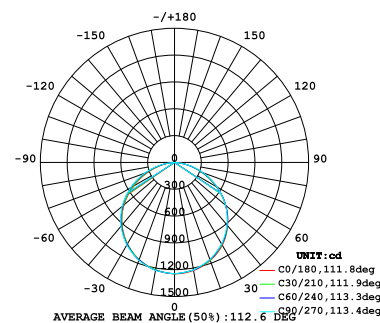


## Dimensions

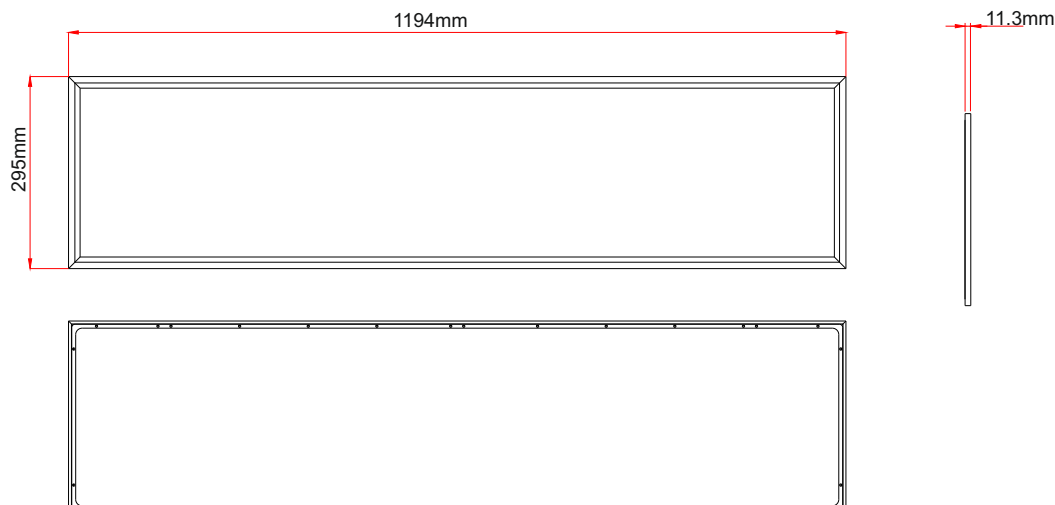

## RALF PANEL 62X62

| Code    | Power | Kelvin     | Lumens |
|---------|-------|------------|--------|
| K-E1046 | 40W   | 2900~3100K | 4400lm |
| K-E1047 | 40W   | 4000~4500K | 4600lm |
| K-E1048 | 40W   | 5000~5500K | 4800lm |

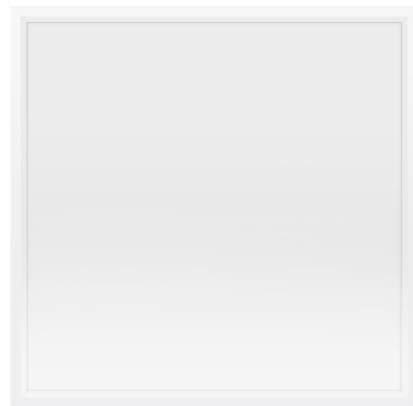


| Input Voltage | Max.Current | Operating Voltage | Constant Current | Power Consumption | Power Factor |
|---------------|-------------|-------------------|------------------|-------------------|--------------|
| AC200-240V    | 0.25A       | DC40V             | 0.9A             | 40W               | ≥0.95        |



| Operating Temperature | Storage Temperature | Humidity Operating | Humidity Storage | Packing dimension | G.W   |
|-----------------------|---------------------|--------------------|------------------|-------------------|-------|
| -20℃to+50℃            | -30℃to+60℃          | 10-80%RH           | 10-90%RH         | L720*W55*H680MM   | 7.5Kg |

Outer carton package

6\*1layer= 6PCS/carton, L695\*W180\*H725mm,GW:23.54KG

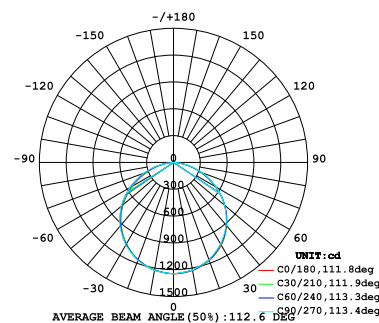

## Dimensions

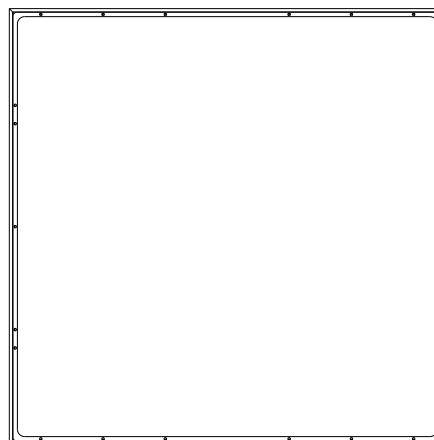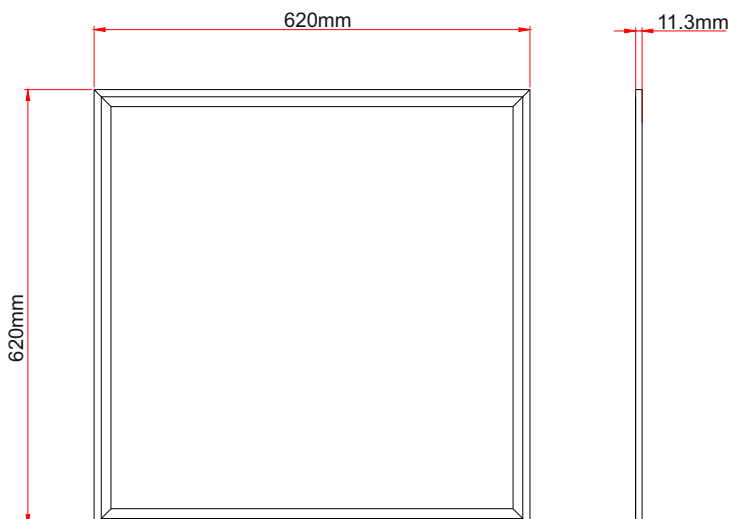

# RALF PANEL 60X120


| Code    | Power | Kelvin     | Lumens |
|---------|-------|------------|--------|
| K-E1049 | 60W   | 2900~3100K | 6000lm |
| K-E1050 | 60W   | 4000~4500K | 6300lm |
| K-E1051 | 60W   | 5000~5500K | 6600lm |



| Input Voltage | Max.Current | Operating Voltage | Constant Current | Power Consumption | Power Factor |
|---------------|-------------|-------------------|------------------|-------------------|--------------|
| AC200-240V    | 0.36A       | DC36V             | 1.35A            | 60W               | ≥0.95        |

| Operating Temperature | Storage Temperature | Humidity Operating | Humidity Storage | Packing dimension | G.W  |
|-----------------------|---------------------|--------------------|------------------|-------------------|------|
| -20℃to+50℃            | -30℃to+60℃          | 10-80%RH           | 10-90%RH         | L1295*W55*H655MM  | 13Kg |

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Outer carton package | 4*1layer= 4PCS/carton, L1310*W180*H655mm,GW:28.0KG |
|----------------------|----------------------------------------------------|

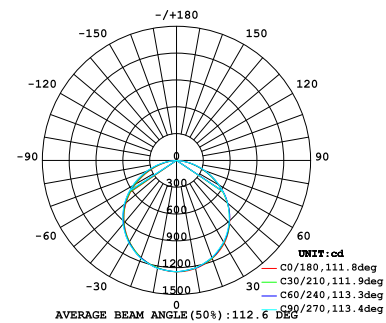

## Dimensions

