


RALF UGR PANEL 60X60

Code	Power	Kelvin	Lumens
K-E1052	36W	2900~3100K	3960lm
K-E1053	36W	4000~4500K	4140lm
K-E1054	36W	5000~5500K	4320lm

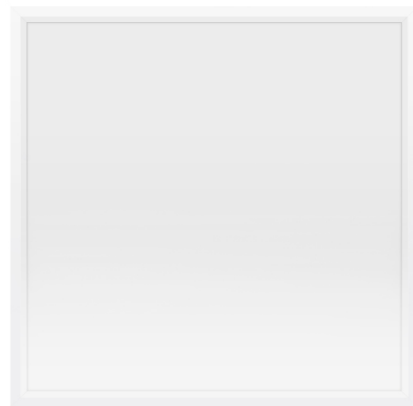


Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.23A	DC40V	0.8A	36W	≥0.95



Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L695*W55*H955MM	6.6Kg

Outer carton package

6*1layer= 6PCS/carton, L670*W180*H695mm,GW:21KG

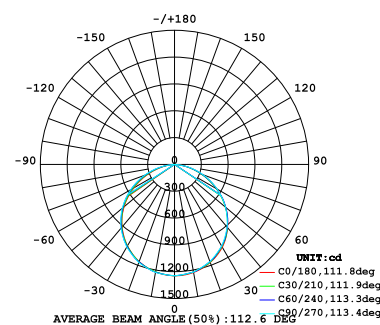

Dimensions

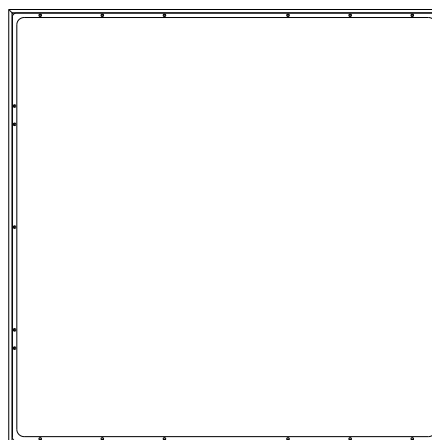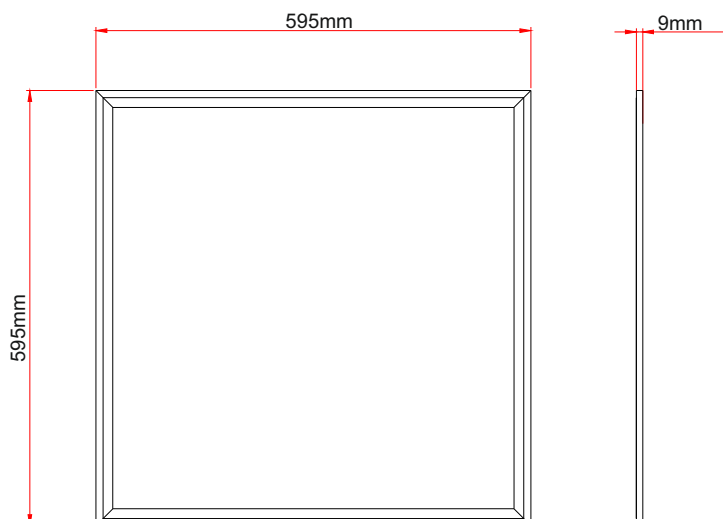

RALF UGR PANEL 30X120

Code	Power	Kelvin	Lumens
K-E1055	36W	2900~3100K	3960lm
K-E1056	36W	4000~4500K	4140lm
K-E1057	36W	5000~5500K	4320lm




Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.23A	DC40V	0.8A	36W	≥0.95


Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1295*W55*H355MM	7.0Kg

Outer carton package


6*1layer= 6PCS/carton, L1310*W180*H355mm,GW :22KG

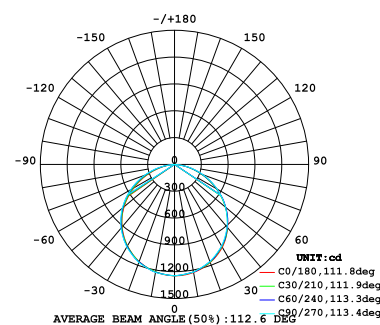

Dimensions

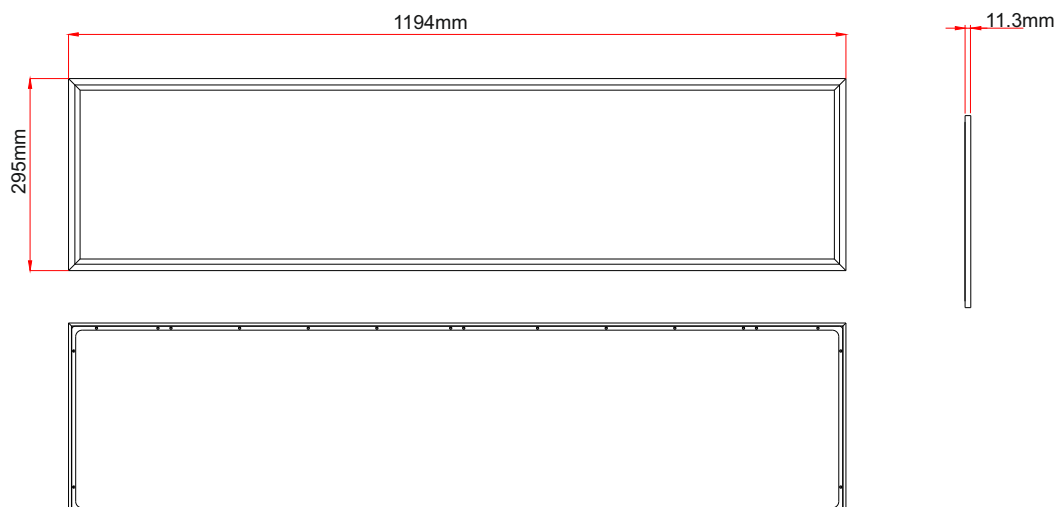

RALF UGR PANEL 62X62

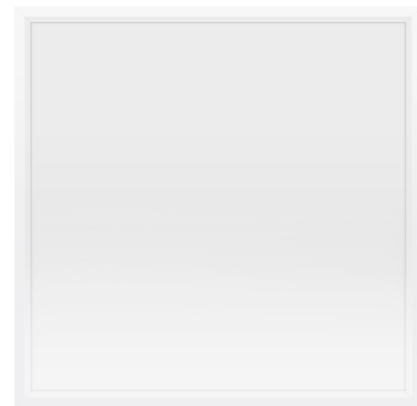

Code	Power	Kelvin	Lumens
K-E1058	40W	2900~3100K	4400lm
K-E1059	40W	4000~4500K	4600lm
K-E1060	40W	5000~5500K	4800lm




Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.25A	DC40V	0.9A	40W	≥0.95

Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L720*W55*H680MM	7.5Kg

Outer carton package

6*1layer= 6PCS/carton, L695*W180*H725mm,GW:23.54KG

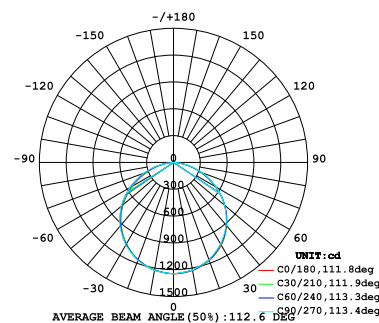

Dimensions

